


## PLATINUM SMART-HEAT™ ELECTRIC

---

Available in black and white, our Platinum Smart-Heat™ Electric heater is specifically suited for low-clearance and design-focused spaces. This slim-line, stainless-steel unit spreads comfort evenly in its space, all while minimizing light emission and blending seamlessly into the background with our recess mounting solutions.



**2300W SERIES**  
BLACK | WHITE

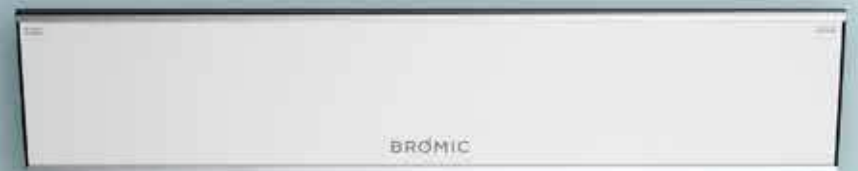

**3400W SERIES**  
BLACK | WHITE

# SPECIFICATIONS

Reference the specification guide below to help you select the correct solution for your needs.

MODEL NUMBER	2300W SERIES	3400W SERIES
PRODUCT CODES	BH0320003   BH0320007	BH0320005   BH0320008
FUEL TYPE	ELECTRIC	ELECTRIC
COLOR	BLACK   WHITE	BLACK   WHITE
HEAT AREA	65FT <sup>2</sup>	108FT <sup>2</sup>
RATED CURRENT **	230 - 240V/9.6A	230 - 240V/14.2A
MINIMUM FLOOR CLEARANCE	WALL 72"   CEILING 96"	WALL 72"   CEILING 96"

## MOUNTING OPTIONS

CEILING MOUNT	✓	✓
CEILING RECESS KIT PRODUCT CODES	BH3130017	BH3130027
WALL MOUNT	✓	✓
RECESSED   FLUSH MOUNT	✓	✓
CEILING POLE MOUNT	✓	✓
CEILING POLE (2') PRODUCT CODE	BH3130023	BH3130023
CEILING POLE (4') PRODUCT CODE	BH3130024	BH3130024
FREESTANDING	-	-

## CONTROL OPTIONS

ON   OFF	✓	✓
ON   OFF PRODUCT CODE	BH3130010-1	BH3130010-1
DIMMER	✓	✓
DIMMER PRODUCT CODE	BH3130011-1	BH3130011-1
MASTER REMOTE *	✓	✓

\* Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 100ft of heaters.


Measurements displayed within this document are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in inches.

# DIMENSIONS


With a wide range of sizes available, find the ideal heater to suit your outdoor space.

## PROFILE

2300W




3400W




## CEILING RECESS


CEILING RECESS FRAME 2300W

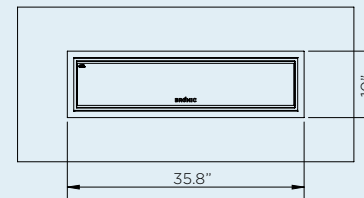




CEILING RECESS FRAME 3400W

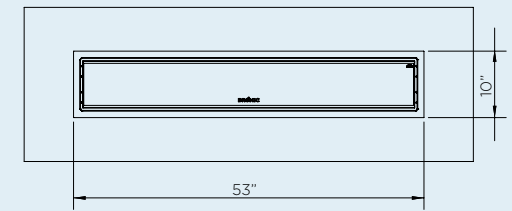

MINIMUM CAVITY OPTION 1

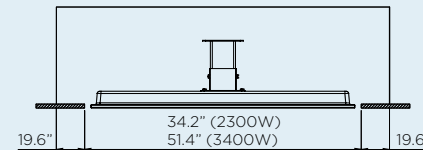

MINIMUM CAVITY OPTION 2

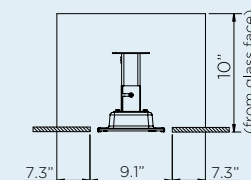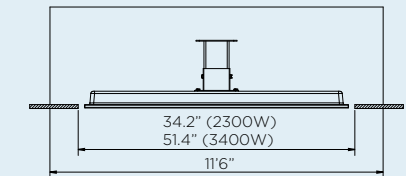


# MOUNT OPTIONS

With a wide array of mounting options, Bromic offers solutions to compliment any decor and provide functionality for ambiance and comfort.


## CEILING & WALL MOUNT

### CEILING MOUNT CLEARANCE

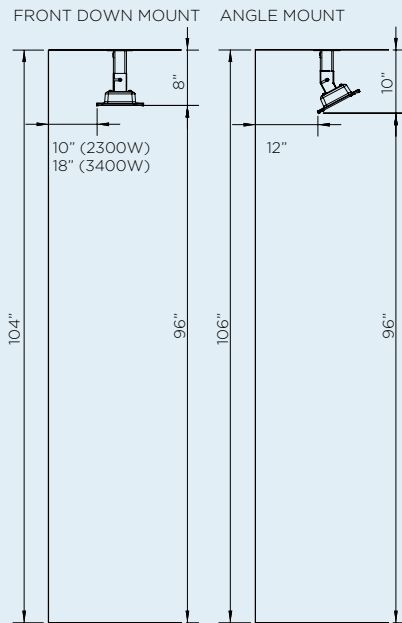


### CEILING POLE CLEARANCE


#### WALL MOUNT CLEARANCE

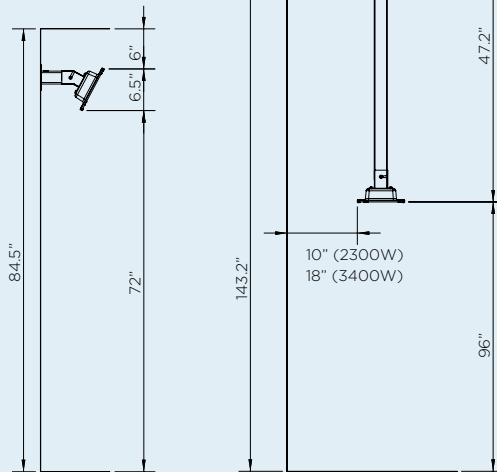

## WALL BRACKET (INCLUDED)



## CEILING BRACKET (INCLUDED)




# HEATING REACH

Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution options to suit your outdoor heating needs.

## HEAT AREAS

**2300W SERIES**  
HEATING APPROXIMATELY 65FT<sup>2</sup>  
2300W HEATING POWER

**3400W SERIES**  
HEATING APPROXIMATELY 108FT<sup>2</sup>  
3400W HEATING POWER

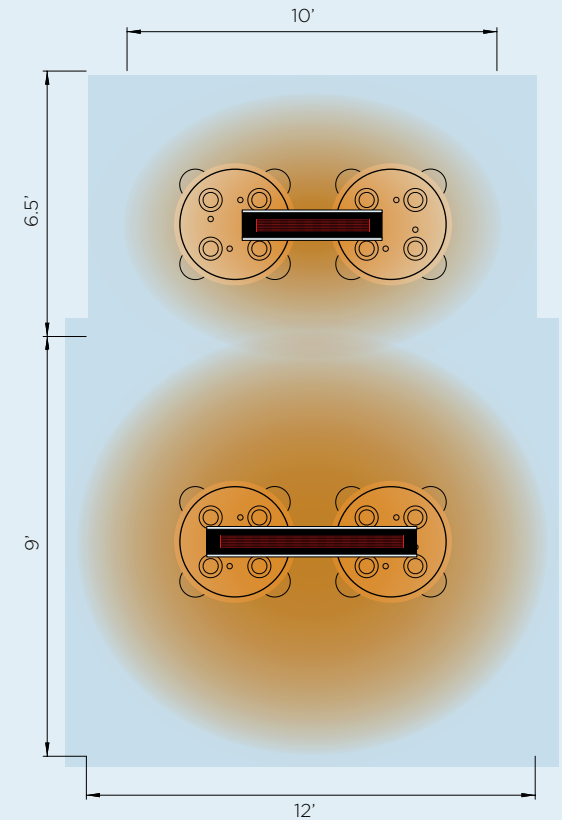

## CONTROL OPTIONS




ON | OFF CONTROL



DIMMER CONTROL



MASTER REMOTE



EXTEND YOUR COMFORT OUTDOORS  
WITH THE SUPERIOR HEAT AND  
AWARD-WINNING DESIGN OF OUR  
SMART-HEAT™ OUTDOOR HEATERS.

---

**VERSATILE MOUNTING SOLUTION**

Minimal vertical clearance

**HIGH PERFORMANCE CONSTRUCTION**

304 stainless-steel & tinted ceramic screen



**CLEAN, COMPACT AND ELEGANT DESIGN**

For seamless integration

**ADJUSTABLE MOUNTING BRACKETS**

Allows for directional heat distribution



**COMPATIBLE WITH SMART-WIRELESS TECHNOLOGY**

**BROMIC.COM/HEAT**

ASIA PACIFIC | NORTH AMERICA | EUROPE

Bromic pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.